

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number
WO 2005/074519 A3

- (51) International Patent Classification:
B41L 39/00 (2006.01) *B41J 11/42* (2006.01)
- (21) International Application Number:
PCT/US2005/002539
- (22) International Filing Date: 28 January 2005 (28.01.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/540,933 30 January 2004 (30.01.2004) US
- (71) Applicant (for all designated States except US): **L & P PROPERTY MANAGEMENT COMPANY** [US/US]; 4095 Firestone Blvd., South Gate, CA 90280 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CODOS, Richard, N.** [US/US]; 34 Casale Drive South, Warren, NJ 07060 (US). **COLLAN, William, W.** [US/US]; 11 Crest Circle Drive, Freehold, NJ 07728 (US). **QUATTROCIOCCHI, Angelo** [US/US]; 120 King High Drive, Thornhill, Ontario L4J-3N4 (CA). **VOGEL, Peter** [CH/CH]; Thole 1174, CH-9428 Walzenhausen, AR (CH).
- (74) Agents: **JORDAN, Joseph, R.** et al.; Wood, Herron & Evans, L.L.P., 2700 Carew Tower, Cincinnati, OH 45202 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

- (88) Date of publication of the international search report:
27 April 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- (54) Title: HIGH PRECISION FEED PARTICULARLY USEFUL FOR UV INK JET PRINTING ON VINYL

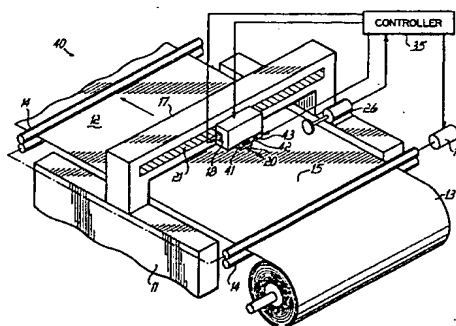

- (57) Abstract: An apparatus (30, 40, 50) and a method of ink jet printing are disclosed that use a system for feeding a substrate longitudinally relative to a support area and a system for moving a printhead parallel to the direction of substrate feed. Indexing between transverse scan rows of a printhead (20) is carried out initially by the substrate feed system (16) and the actual feed distance is measured using an encoder or other substrate position measurement device (26). A controller (25) determines the amount of any error that occurs between the actual and the desired feed distances. The controller (25) then sends signals to move the printhead (20) to compensate for any error in the feed system feed. Compensating adjustments are then made to the next subsequent substrate indexing step so that the printhead tends to move back toward its home or zeroed position with its next correction and does not walk away from this home position as a result of cumulative movements. For printers that have bridges (17) moveable relative to the machine frame (11) on which the printhead (20) is carried, printhead motion is achieved by moving the bridge, for example, by actuating a linear servo bridge motion system (31). For fixed bridge roll-to-roll printers, the printhead (20) can be caused to shift longitudinally on the bridge (17) to make the correcting movements.